

SINGLE STRAIGHT MAIN TRUNK TO 7' HEIGHT: Branches below may eventually require removal for height clearance

BRANCHING: Minimum clear stem height - 5'. Remove lower branches in successive years to provide clearance for vehicles and people.


ROOT FLARE shall be level or up to 1 - 2" above finished grade.

REMOVE TRANSIT GUARD and replace with a 4" corrugated P.V.C. guard.

2 - 4" OF WOODY MULCH: Aged wood chips, shredded bark, or similar mulch.

REMOVE CONTAINER OR OTHER SUPPORTING MATERIAL: or cut top and fold down in the pit after positioned for backfill planting. Cut and remove or fold down burlap from upper 1/2 of ball. Cut and remove all Poly ties.

WATER THOROUGHLY to eliminate air pockets, settling, and to soak ball & surrounding soil.

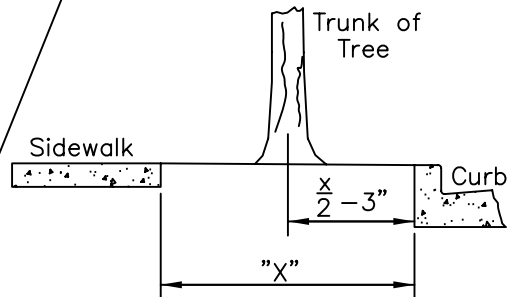

PROPER TREE LOCATION (Parkway area check every street for "X")

GRADE

BACKFILL: Excavated soil or amended as specified. Do not Tamp!

SOIL UNDER BALL UNDISTURBED to support root ball and reduce settling

BREAK DOWN SIDES OF THE HOLE when backfilling

2 1/2 TIMES BALL DIAMETER (minimum)



City of Oak Creek
Department of Public Works

Drawn By: K.C. Seufzer

Scale: N.T.S.

Appv. By: M.J. Sullivan

Date: January, 1999